
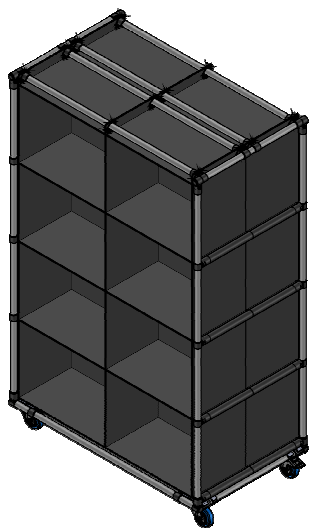
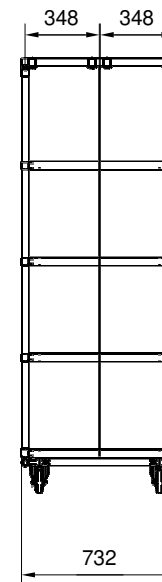


A
B
C
D
E
F

12345678

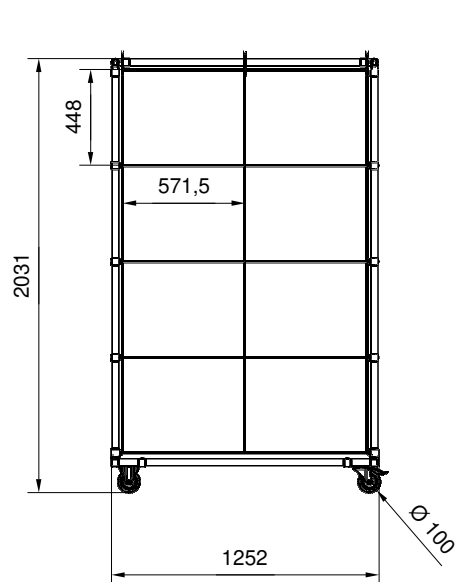


*Double-sided design / Textile inserts on front and back

This document is the sole property of **Enprag s.r.o.** and may not be copied, duplicated, used or given to third parties without the written permission from **Enprag s.r.o.** Misuse is subject to penalties and will be legally pursued

Tolerances for shape and condition:
- **DIN ISO 2768-2-K**
Tolerancing:
- **DIN 7167**

Workshop accuracies for general tolerances - Tolerances for length and angle dimensions; DIN ISO 2768-1-v
Machining details and finish classification to DIN ISO 1302



Total load capacity:
*Uniformly Distributed Load **032 kg**

Insert load capacity (*UDL): 002 kg

Scale: **1:25**

Drawn: **Kempný**

Checked:

Date: **23.10.2026**



Textile insert trolley

Sheet 1 of 1

Rev: 0

Doc. number: **26050732**

12345678