




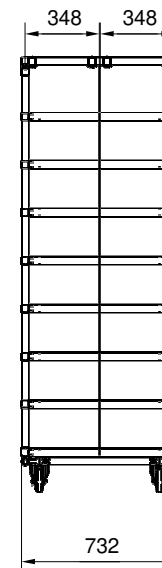

VIEW A

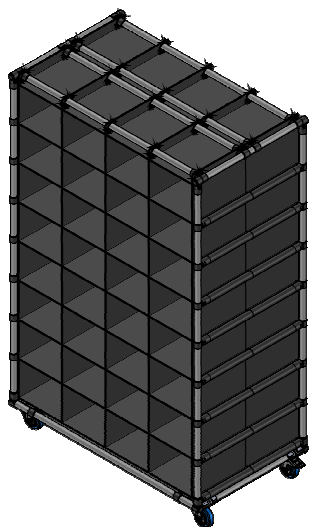


*Double-sided design / Textile inserts on front and back

This document is the sole property of **Enprag s.r.o.**
and may not be copied, duplicated, used or given to
third parties without the written permission from **Enprag s.r.o.**
Misuse is subject to penalties and will be legally pursued

Tolerances for shape and condition:
- **DIN ISO 2768-2-K**
Tolerancing:
- **DIN 7167**

Workshop accuracies for general tolerances - Tolerances for length and angle dimensions; DIN ISO 2768-1-v
Machining details and finish classification to DIN ISO 1302



Total load capacity: *Uniformly Distributed Load	128 kg
--	---------------

Insert load capacity (*UDL):	002 kg
------------------------------	--------

Scale:

1:25

Drawn:	
--------	--

Kempný

Checked:	
----------	--

Date:

23.10.2026



Textile insert trolley

Sheet 1 of 1

Rev: 0

Doc. number:	26050733
--------------	----------